NOZZLE THERMOCOUPLES

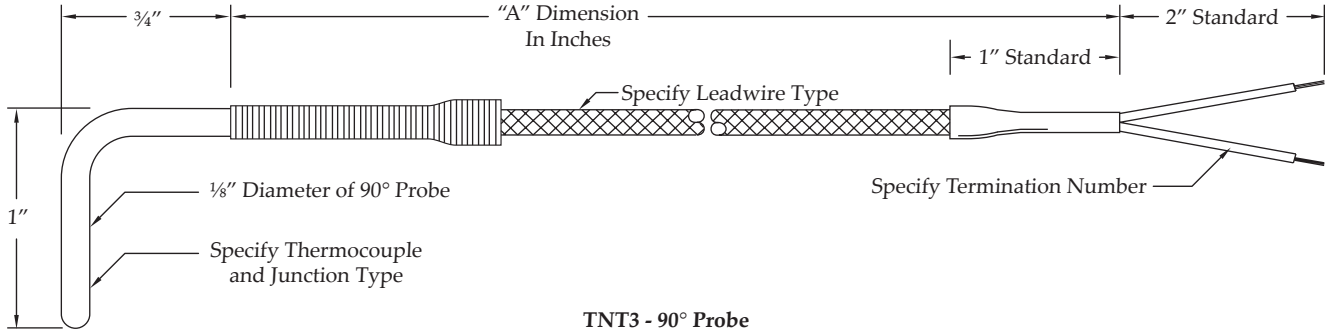

TNT3 - 90° Probe

Leadwire Type

Leadwire Number	Description
H	Stranded Fiberglass Leadwire with SS Overbraid
J	Stranded Fiberglass Leadwire with SS Armor

Termination Options

Termination Number	Description
0	2″ Split Leads
1	#6 Spade Lugs
3	Standard Plug

Part Number Sequence

TNT3-JG-072H0Z See tables on page 54

TNT3	-	J	G	-	072	H	0	Z
Sensor Type & Style No.		Thermocouple Type	Junction Type		"A" Dimension	Leadwire Type	Termination Option	Enter Z

SHIM STOCK THERMOCOUPLES

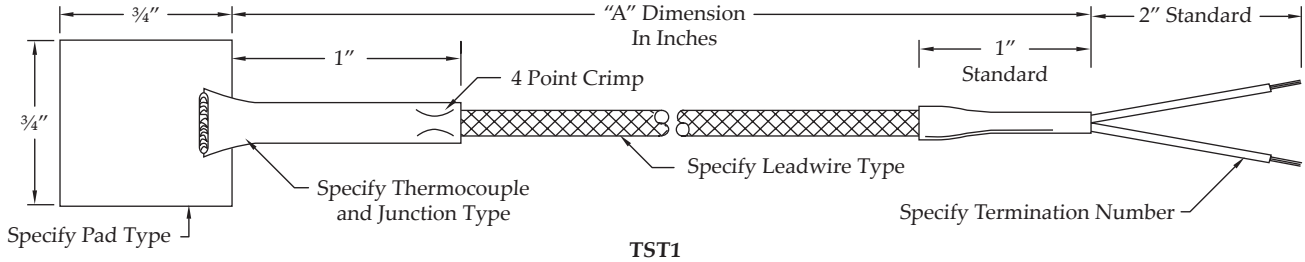

TST1

Leadwire Conductor is Stranded with Fiberglass Insulation

Leadwire Type

Leadwire Number	Description
G	Stranded Fiberglass Leadwire with Fiberglass Jacket
H	Stranded Fiberglass Leadwire with SS Overbraid Shield
J	Stranded Fiberglass Leadwire with SS Armor Cable Shield

Termination Options

Termination Number	Description
0	2″ Split Leads
1	#6 Spade Lugs
3	Standard Plug

Pad Options

Pad Type	Description
S	¾″ x ¾″ x .007″ Thick
P	1″ x 1″ x .032″ Thick
B	1″ x 1″ x .060″ Thick

Part Number Sequence

TST1-JG-036G0P See tables on page 54

TST1	-	J	G	-	036	G	0	P
Sensor Type & Style No.		Thermocouple Type	Junction Type		"A" Dimension	Leadwire Type	Termination Option	Pad Type

190 Detroit Street, Cary, Illinois 60013 • Phone: 847-639-5600 • Fax: 847-639-2199 • Web: www.durexindustries.com • TOLL FREE: 800-762-3468

Rev 1/28/15